

**CUSTOM-BILT  
METALS**

**LAST-TIME®** Brand Products

**TITAN®** STANDING SEAM  
METAL ROOFING PANEL  
**CB-150**

**ENERGY EFFICIENCY WITH STYLE & DURABILITY**



METAL ROOFING FOR RESIDENTIAL AND  
COMMERCIAL APPLICATIONS.



Featuring the **TITAN®CoolRoof** Reflective Paint  
System. Available in over 30 ULTRA-Cool® colors.

Call 1-800-826-7813 [www.custombiltmetals.com](http://www.custombiltmetals.com)

**CUSTOM-BILT  
METALS**

**LAST-TIME®** Brand Products  
Since 1974

	Seam Height	Standard Panel Widths	Minimum Slope	Curved Panel Option	Seam Sealant Option	Spaced Purlin Application	RATED UL 580-Class 90	TESTED ASTM E-1592	TESTED ASTM E-1880, E-1646
CB-2000 Mechanical Seam	2 inch	14", 18"	1/2" in 12"	●	●	●	●	●	●
CB-150 Mechanical Seam	1 1/2"	12", 16"	1" in 12"	●	●	●	●	●	●
CB-100 Mechanical Seam	1 inch	13", 17"	1" in 12"	○	○	○	○	○	○
SL-1750 Snap Lock	1 3/4"	14", 18"	3" in 12"	○	●	●	●	●	●
SL-100 Snap Lock	1 inch	12", 16"	3" in 12"	○	○	○	○	●	○
SLZ-1000 Snap Lock	1 inch	13", 17"	3" in 12"	○	○	○	○	●	○
CS-100 Cap Seam	1 inch	14 1/2", 18 1/2"	3" in 12"	●	○	○	●	○	●
WS-100 Wall & Soffit	1 inch	12"	NA	○	○	●	NA	NA	○

Product availability varies in each location.

● YES ○ NO

**MATERIALS:**

Prefinished or Bare Zincalume®/Galvalume or G-90 Galvanized Steel in 24 & 26 gauge, 22 gauge (non-standard) Copper-16oz. or 20oz. (non-standard) Prefinished Aluminum in .032 Thickness.

**PAINT AND COLOR:**

Titan® Cool Roof Reflective Paint utilizing BASF® and Kynar 500® technology in over 30 colors. See architectural color selection chart, and request an actual metal sample for final paint and color selection.

**SPECIFICATIONS:**


Mechanical seam locking standing seams 1 1/2" high with a panel width of 12" or 16" (Other widths available as non-standard)

**OPTIONAL STYLES:**

Stiffening Ribs or Striations (ask for details)



**CB-150 AFTER SEAMING**

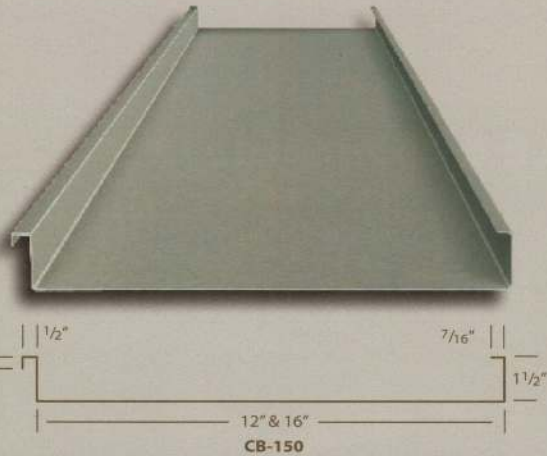

**1 1/2" HIGH TITAN CB-150 MECHANICAL SEAM**  
Allowable Live Load (psf)

	# of equal Span	Panel Span (ft.)			
		2	3	4	5
12" width	1	235	104	59	38
24 Gauge	2	239	106	60	38
	3	279	124	70	45
16" width	1	144	64	36	23
24 Gauge	2	144	64	36	23
	3	168	75	42	27

Lloads shown are limited by L/240 deflection

**CUSTOM-BILT METALS LOCATIONS**

Kent, WA  
(253) 872-7330  
Chino, CA  
(909) 664-1550  
W. Sacramento, CA  
(916) 372-3706

Portland, OR  
(503) 256-3328  
Phoenix, AZ  
(602) 484-7015  
Spokane, WA  
(509) 533-1703

Honolulu, HI  
(808) 845-1806  
New Orleans, LA  
(504) 838-9344  
San Jose, CA  
(800) 537-6040



[www.CustomBiltMetals.com](http://www.CustomBiltMetals.com)



**COMPARE PANEL FEATURES**

The adjacent chart allows you to compare the various features, options and benefits of different standing seam metal panel systems. Select the seam height, panel width, options, locking system, gauge and engineering suited best for your job.

**CLASSIC STYLING**

Standing Seam metal roofing is one of the oldest and most practical roofing solutions. It's classic look enhances the roofline of virtually all architecture styles. It produces dramatic shadow lines that run continuously from ridge to eave accenting the pitch and plane of every roof angle. Panels may be roll formed at your jobsite or in our factories.

**LAST-TIME® DURABILITY**

The CB-150 is available in over 30 colors featuring TITAN® COOL ROOF Reflective paint system. This system offers an incredible 35 year no fade warranty\*.

**TITAN® COOL ROOF**

Our reflective paint features BASF® and KYNAR 500® reflective pigmentation technology to deliver highly efficient cooling performance. Testing data supports reflectivity of up to 60% of the heat from the sun and energy savings of up to 20%. Now you can have darker roof colors and still enjoy energy savings.

\*For complete guide specifications, installation details, and warranty information visit our website: [www.CustomBiltMetals.com](http://www.CustomBiltMetals.com)